



**LOCAL SITE CONDITIONS INFLUENCING EARTHQUAKE INTENSITIES AND  
SECONDARY EFFECTS IN THE SEA OF MARMARA REGION -  
Application of Standardized Remote Sensing and GIS-Methods in Detecting Potentially  
Vulnerable Areas to Earthquakes, Tsunamis and Other Hazards**

**George Pararas-Carayannis<sup>1</sup>, Barbara Theilen-Willige<sup>2</sup>, Helmut Wenzel<sup>3</sup>**

**ABSTRACT**

The destructive earthquake that struck near the Gulf of Izmit along the North Anatolian fault in Northwest Turkey on August 17, 1999, not only generated a local tsunami that was destructive at Golcuk and other coastal cities in the eastern portion of the enclosed Sea of Marmara, but was also responsible for extensive damage from collateral hazards such as subsidence, landslides, ground liquefaction, soil amplifications, compaction and underwater slumping of unconsolidated sediments. This disaster brought attention in the need to identify in this highly populated region, local conditions that enhance earthquake intensities, tsunami run-up and other collateral disaster impacts. The focus of the present study is to illustrate briefly how standardized remote sensing techniques and GIS-methods can help detect areas that are potentially vulnerable, so that disaster mitigation strategies can be implemented more effectively. Using remote sensing data, causal factors can be determined systematically. With proper evaluation of satellite imageries and digital Digital Elevation Model (DEM) topographic data, specific geomorphologic / topographic settings that enhance disaster impacts can be identified. Coastal areas below the 10 m elevation susceptible to tsunami inundation can be clearly delineated. Height level maps can help locate topographic depressions, filled with recently formed sediments, which are often linked with higher groundwater tables. Such areas are particularly susceptible to higher earthquake intensities and damage. The sum of risk GIS factors increases the susceptibility of local sites in amplifying seismic ground motions. Areas most susceptible to higher earthquake impacts can be identified using a systematic GIS approach, the weighted–overlay-method implemented in ArcGIS. Finally, the data obtained by remote sensing can be converted into Google Earth-kml-format and become available at no cost, to raise public disaster awareness and preparedness in the Sea of Marmara region.

<sup>1</sup>Tsunami Society International, Honolulu, Hawaii, USA

<sup>2</sup>Berlin University of Technology, Institute of Applied Geosciences, GERMANY

<sup>3</sup>VCE Holding GmbH, Wien, AUSTRIA

## **Introduction**

On August 17, 1999, a large destructive earthquake (named as the “Kocaeli earthquake”) struck northwest Turkey and generated a destructive tsunami within the enclosed Sea of Marmara. This was the strongest earthquake to strike Northern Turkey since 1967. Its epicenter was near the Gulf of Izmit, a densely populated area. Official estimates indicated that about 17,000 people lost their lives and thousands more were injured. Most of the destruction and deaths resulted from secondary collateral impacts at locations along coastal area of the Sea of Marmara that were particularly vulnerable because local geologic site conditions exacerbated earthquake intensities. Following the disaster it was determined that there was a need to identify and map such vulnerable sites.

The present study provides a background of the disaster, the geologic setting that makes this region vulnerable and an analysis of how standardized remote sensing techniques, satellite imageries, digital topographic data and a systematic GIS approach that is based on Digital Elevation Model (DEM) data, can be integrated to help determine geomorphologic/topographic settings and identify specific geomorphometric parameters that influence local site conditions which enhance secondary, collateral, disaster impacts.

### **The Izmit Earthquake of August 17, 1999**

Many seismic stations around the world measured the earthquake. Its origin time was 00:01:39.80 (UTC), 03:01:37 am (local time) and its focal depth was shallow (17 km, USGS). The epicenter was at 40.702 N, 29.987 E (USGS), near the town of Gölcük on the western segment of the North Anatolian Fault. There were small differences in magnitude determinations. The surface wave magnitude was given as 7.8 (USGS). The Moment Magnitude was given as  $M_w=7.4$  (USGS; Kandilli). The Duration Magnitude was given as 6.7 (Kandilli) and the Body Wave Magnitude at 6.3 (USGS) and 6.8 (British Geological Survey), respectively. The earthquake resulted from right-lateral strike-slip movement on the fault. Numerous aftershocks with magnitude above 4 were recorded after the main earthquake. The first of the aftershocks (magnitude of 4.6) occurred 20 minutes later. Several others followed in subsequent days. According to the USGS and Kandilli most of the aftershock activity was confined to the region bounded by 40.5-40.8N and 29.8-30.0E, which covers the area between Izmit and Adapazari to the east of the epicenter (Pararas-Carayannis, 1999). However there was a cluster of aftershocks near Akyazi and Izmit.

On 31 August, a strong aftershock killed one person, injured about 166 others and knocked down some of the buildings that were already weakened by the main quake. The aftershocks caused a great deal of damage partly due to local site conditions.

### **The Tsunami of August 17, 1999 in the Sea of Marmara**

The westward propagation of the seismic ruptures along the North Anatolian Fault (NAF) during the 20th century has increased the probability that the next rupture will be located offshore, in the Marmara Sea, in the prolongation of the 1999 Izmit earthquake faulting. Also, there is a high probability that a destructive tsunami will be generated. Historical records indicate that more than 90 tsunamis have occurred along the Turkish coasts between 1410±100 BC and 1999 AD, see Fig. 2. Near Izmit Bay, tsunamis occurred in: 325; 24 August 358; 8

November 447; 26 September 488; 15 September 553; 15-16 August 555; 14 December 557; 715; 740; 19 April 1878; 10 May 1878; and 18 September 1963 (Altinok et. al., 1999). Strong earthquakes in the Marmara Sea in 1509, and in May 1766, broke submarine parts of the NAF, in the vicinity of Istanbul and generated tsunamis. Although the earthquake involved primarily horizontal ground displacements, slumping and landslides triggered tsunami waves which were particularly damaging in the Gulf of Izmit, perhaps because of convergence and a funneling effect. The long duration of the earthquake's ground motions (45 seconds), the directivity of the surface seismic waves, the proximity of the epicenter to the Sea of Marmara and the Gulf of Izmit, and the overall orientation of the affected area, strongly support that the tsunami was generated in the Gulf of Izmit, in the eastern portion of the Sea of Marmara. The tsunami waves had an extremely short period of less than a minute, which also supports the premise that the source was the localized subsidence of coastal areas and the underwater slumping of unconsolidated sediments, rather than larger scale tectonic movements which involved primarily lateral motions (Pararas-Carayannis, 1999). An initial recession of the water was observed at both sides of Izmit Bay immediately after the quake, followed by tsunami waves which had an average run-up of 2.5 m. along the coast. Maximum run-up was 4 meters in Golcuk where there was considerable damage to the naval base facilities. In fact, Golcuk and several coastal areas are now flooded permanently as a result of tectonic subsidence and landslides. Also, large coastal portions of the town of Degirmendere remained flooded as a result of subsidence - with sea level reaching the second floors of apartment buildings. Similar permanent flooding, but to a lesser extent, occurred also at Karamursel.

Future tsunamis may be triggered either by submarine co-seismic displacements or by landslides (Hebert, 2005). Even earthquakes involving primarily horizontal ground motions (strike-slip type of faulting) can generate tsunamis by triggering slope failures and underwater landslides. Obviously the susceptibility of coastal regions along the Sea of Marmara needs to be carefully evaluated.

### **Seismotectonic and Geologic Setting**

Before discussing how standardized remote sensing and GIS methods can be applied in the identification of sites potentially vulnerable to earthquakes, tsunamis and other collateral hazards, we must first review briefly the seismotectonic and geologic setting of this region.

The Sea of Marmara is an inland sea separating Asia Minor from Europe. It is 280 km (175 miles) long and almost 80 km (50 miles) wide at its greatest width. On its northeast end, it connects with the Black Sea through the Bosphorus Strait. On its southwest end it connects with the Aegean Sea through the Dardanelles. Although its total area is only 11,350 square km (4,382 square miles), its average depth is about 494 m (1,620 feet), reaching a maximum of 1,355 m (4,446 feet) in the center. The sea was formed as a result of tectonic movements that occurred about 2.5 million years ago, in the Late Pliocene (Pararas-Carayannis, 1999).

The excessive seismicity of this particular region (Fig.1) can be explained by current geophysical knowledge of its structural development. Turkey is being squeezed sideways to the west as the Arabian plate pushes into the Eurasian plate. The north Anatolian fault forms the edge of this Turkish (Anatolian) crustal block so that destructive earthquakes happen regularly along it as different sections break (Pararas-Carayannis, 1999).

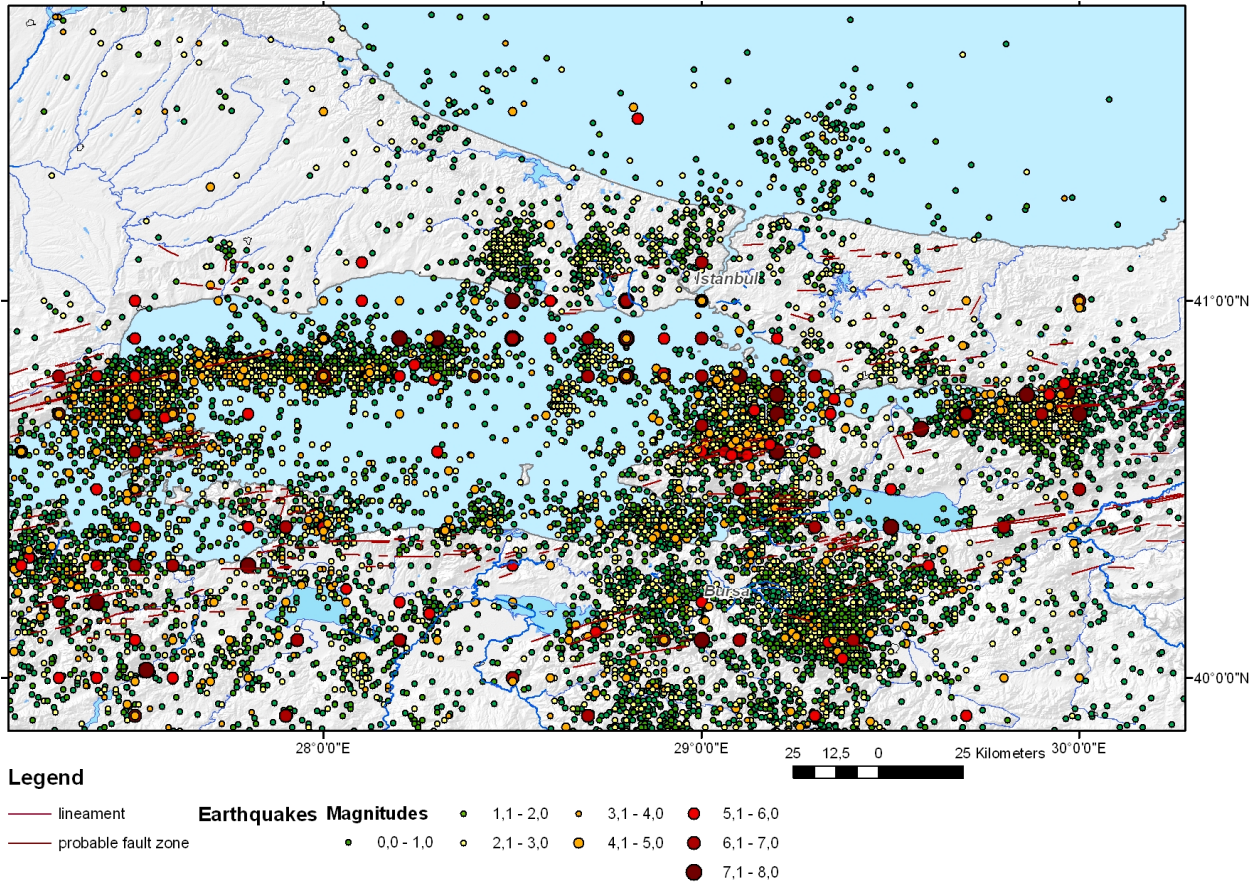


Fig.1: Earthquake distribution in the Sea of Marmara area tracing the major fault zones (Data sources: Kandilli Observatory, ISC, USGS, BGR)

The earthquake of August 17, 1999 occurred along the long, east-west trending, great North Anatolian Fault Zone (NAFZ) - known to be the most prominent active fault system in Northwestern Turkey. The NAFZ is a major fracture that traverses the Northern part of Asia Minor and marks the boundary between the Anatolian tectonic plate and the larger Eurasian continental block. It has been the source of numerous large earthquakes throughout history. The NAFZ splits into three strands at the eastern part of the Marmara Sea. The northern strand passes through Izmit Bay, traverses Marmara Sea and reaches to the Saros Gulf (Barka and Kadinsky-Cade, 1988). The central fault zone passes through Izmit Bay, traverses the Sea of Marmara and reaches the Saros Gulf to the southeast. Because of this unstable tectonic system, the area is considered as one of the most seismically active zones of the world. In the last hundred years, numerous large earthquakes have also occurred along the NAF, in the western part of the country. Beginning with an earthquake in 1939, several more quakes - with Richter magnitudes greater than 6.7 - struck in progression along adjacent segments of the great fault (Pararas-Carayannis, 1999). The August 17, 1999 Izmit earthquake was the eleventh of such a series that have broken segments of the NAF, in both eastward and westward direction. Fig. 2 shows the epicenter of the earthquake near Izmit, as well as the location and sequence of previous events. The sequence of historic events indicates that the next destructive tsunamigenic earthquake could occur west of the 1999 event, in the Sea of Marmara.

## Location of August 17, 1999 Turkish Earthquake

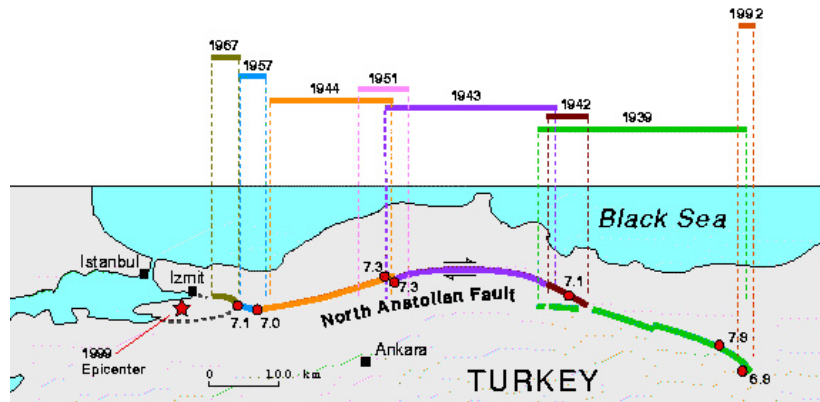


Figure 2: Historical Earthquake Activity Along the Northern Anatolian Fault (Source: Kandilli)

### Earthquake's Surface Rupture and Ground Displacements

The earthquake's surface rupture in August 17, 1999 extended for about 100 km east of Golcuk. The rupture turned northeast near Akyazi, where a cluster of aftershocks subsequently occurred. Ground displacements of about 1.5 m were measured in this area. Subsequent field studies indicated right lateral ground displacements ranging from 2.5-3 m up to 4 m, with a maximum of 4.2 m east of Lake Sapanca. Ground displacements between Lake Sapanca and the Gulf of Izmit were about 2.60 m. Additionally, there was evidence of about 2 meters subsidence along the north side of the fault's block - which was particularly evident along the coastline at Golcuk, where tsunami waves and major flooding occurred (Pararas-Carayannis, 1999).

### Potential Collateral Hazards Associated with Earthquakes and Tsunamis in the Sea of Marmara Region

The Sea of Marmara is traversed by numerous deformed and offset branches and strands of the NAF, where destructive tsunamigenic earthquakes can occur. The E-W trending Izmit Bay is a tectonically active basin which is particularly susceptible to earthquakes, tsunamis and collateral hazards such as subsidence, landslides, ground liquefaction, soil amplifications, compaction and underwater slumping of unconsolidated sediments.

The entire bay area is covered mainly by fine-grained sediments from fluvial and littoral processes. When the 1999 earthquake struck, the local geologic site conditions exacerbated earthquake intensities. Subsidence, coastal landslides and tsunami waves caused destruction at Degirmendere and Karamursel. If an earthquake and tsunami disaster similar to the 1999 or 1509 were to strike again the Sea of Marmara region, closer to metropolitan Istanbul, loss of lives and the destruction to infrastructure facilities and cultural sites would be severe. It would take many years to recover from the economic damage and to repair the infrastructure. There could be major damage to trains and stations.



for Russia, Central Asia and Europe. Thus, it becomes obvious that a program of disaster preparedness for the entire region requires proper identification of specific site vulnerabilities to natural disasters and to the potential impact of collateral hazards.

### **Application of Standardized Remote Sensing and GIS-Methods in Detecting Potentially Vulnerable Areas to Earthquakes, Tsunamis and Other Hazards in the Sea of Marmara Region.**

As the 1999 disaster demonstrated, local site conditions influence earthquake intensities and can result in collateral destruction. Generative causes may include a combination of tectonic movements associated with an earthquake or major sub aerial or underwater slides which can generate destructive local tsunamis. Secondary phenomena associated with a large earthquake will depend on the energy release, the physical rupture along the fault, the propagation path of surface seismic waves and the magnitude and duration of the dynamic, near-field, strong motions. Earthquake ground motions of high intensity could result in strong accelerations or ground liquefaction (Pararas-Carayannis, 1999) which can also trigger landslides, sudden subsidence, slumping or the generation of destructive waves.

LANDSAT ETM and DEM data can be used as layers in generating a Hazard GIS database for the Sea of Marmara region. To enhance the LANDSAT ETM data, digital image processing procedures can be carried out. As a complementary tool, Google Earth Pro Software can be used in order to benefit from the high-resolution 3D imageries of the coastal areas.

A systematic GIS approach based on SRTM Digital Elevation Model (DEM) data (Shuttle Radar Topography Mission, with 90m spatial resolution) and ASTER-data (with 30m resolution, interpolated up to 15 m), or data , can help extract geomorphometric factors and thus identify sites that are potentially susceptible to soil amplification in the Sea of Marmara region. For a geomorphologic overview and for deriving the specific, characteristic, geomorphologic features of vulnerable sites, terrain parameters and morphometric maps can be extracted from DEM data, such as shaded relief, aspect and slope degree, minimum and maximum curvature, or profile convexity maps, using ENVI / CREASO and ArcGIS / ESRI software.

Causal or preparatory factors can be determined systematically: Areas with the steepest slopes can be identified from slope gradient maps. Areas with highest curvatures susceptible to landslides can be identified from curvature maps (Figs.4 and 5). Coastal areas below the 10 m elevation susceptible to tsunami inundation can be clearly delineated from hypsographic maps. Factors such as height levels, slope gradients, terrain curvature and traces of faults are combined with lithologic and seismotectonic information in a GIS database. Figure 5 indicates the causal factors that influence earthquake ground intensities, and how these factors can be extracted, based on SRTM and ASTER data, geologic maps and evaluations of LANDSAT data. Of course, many other factors play an important role and, if available, should be included in the database.

The same maps can help locate topographic depressions that may be filled with alluvial deposits, which are often linked with higher groundwater tables. Such areas are particularly susceptible to higher earthquake shock and damage. In order to detect areas with aggregation and sum of risk factors that characterize the susceptibility of local sites in amplifying seismic ground motions, a systematic ArcGIS approach can be used: the weighted–overlay–method.

Finally, the data obtained by remote sensing can be converted into Google Earth-kml-format and become available at no cost, to raise public disaster awareness in the Sea of Marmara

region. The approach presented here is meant to serve as a first basic data stock in getting a perception of potential sites susceptible to higher earthquake shock and for the planning of

Fig.4: Basic GIS


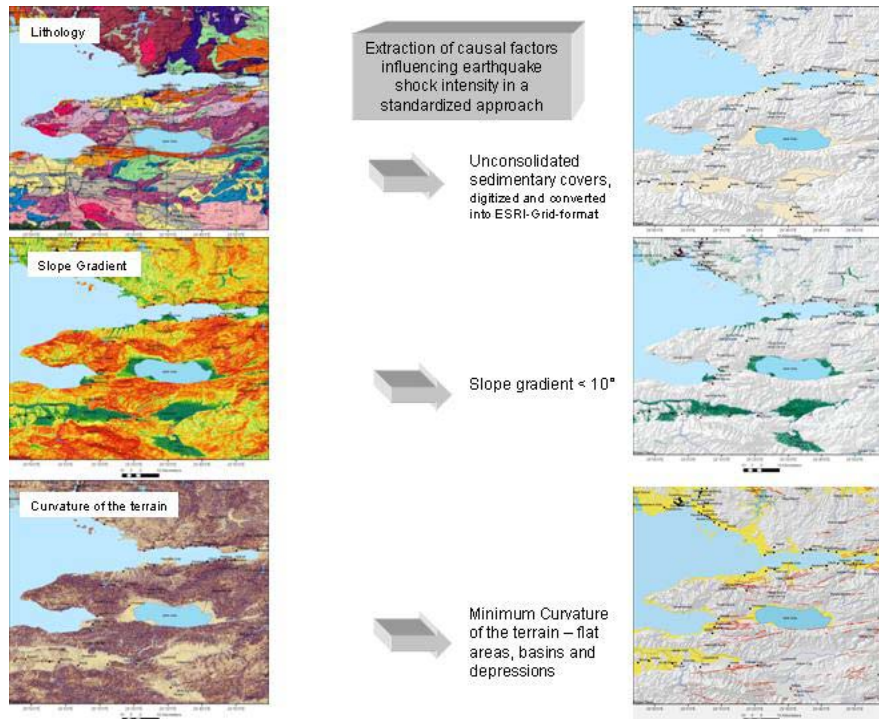


Fig.5: Extraction of some causal factors based on SRTM and ASTER data, geologic maps and evaluations of LANDSAT data.

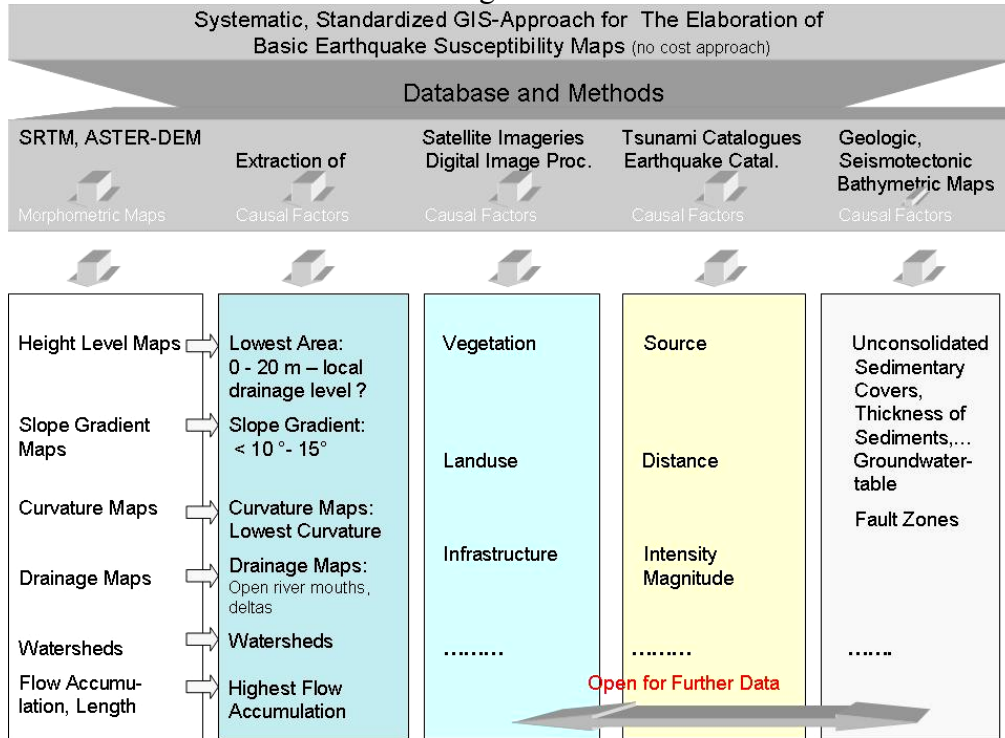

additional geotechnical investigations. Figure 6 illustrates an example of the weighted overlay-calculation of the Eastern Sea of Marmara indicating areas that are assumed to be more susceptible to higher earthquake shock according to morphometric and geologic surface properties.

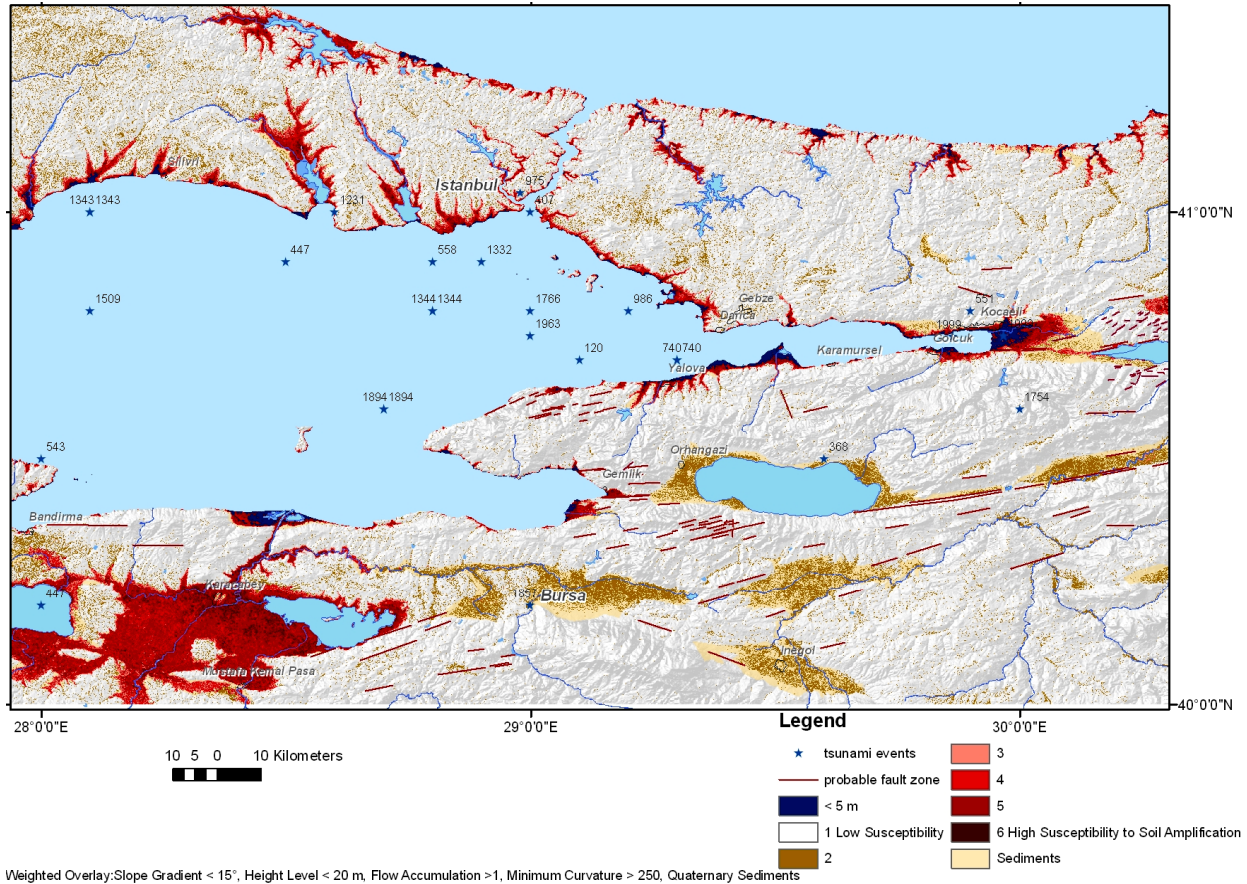


Fig. 6: Areas susceptible to relatively higher earthquake shock

### Conclusions

The nearly world-wide available SRTM and ASTER-DEM data and LANDSAT imageries support a standardized, low-cost to no cost approach for the detection of some of the near-surface, causal factors of local site conditions influencing earthquake shock and damage intensity as well as of some of the secondary effects. Aggregating factors influencing the near-surface earthquake ground motion intensities in a GIS environment, allows a first overview of areas with probably higher susceptibility to soil amplification. Thus, remote sensing data and GIS integrated evaluations and analysis can contribute to a better planning of cost and time-intensive geotechnical measurements. The more geotechnical site data exist, the better and more detailed the resulting susceptibility maps will be. The advantage of GIS is that the system is open and additional data can be integrated as layers as soon as additional data becomes available.

### Acknowledgments

The support of this study from the European Commission in the scope of the IRIS-Project

- EU, FP 7, Large Collaborative Research Project, IRIS - Integrated European Industrial Risk Reduction System, CP-IP 213968-2-, is kindly acknowledged.

## References

- Altinok, Y. et al. (2001): Historical tsunamis in the Sea of Marmara.- ITS, 2001, Proceedings, Session 4, Number 4-2
- Sörensen, M.B., Oprsal, I., Bonnefoy-Claudet, S., Kuvvet Atakan, Martin Mai, P., Pulido, N. and Caglar Yalciner (2006): Local site effects in Ataköy, Istanbul, Turkey, due to a future large earthquake in the Marmara Sea.- *Geophysical Journal International*, Volume 167 Issue 3, 1413 - 1424
- Altinok, Y., Alpar, B., Ersoy, S., and A. C. Yalciner, (1999). Tsunami Generation of the Kocaeli Earthquake of August 17, 1999 in Izmit Bay; coastal observations, bathymetry and seismic data. *Turkish Journal of Marine Sciences* 5 (3): 131-148 (1999).  
<http://www.drgeorgepc.com/TsunamiTurkey.html>
- Armijo, R., Meyer, B., Navarro, S., King, G. and Aykut Barka (2002): Asymmetric slip partitioning in the Sea of Marmara pull-apart: a clue to propagation processes of the North Anatolian Fault?- *Terra Nova*, Vol 14, No. 2, 80–86, 2002 Blackwell Science Ltd.
- Ansal, A., M. Erdik, J. Studer, S. Springman, J. Laue, J. Buchheister, D. Giardini, D. Faeh, D. Koksal (2004). Seismic Microzonation for Earthquake Risk Mitigation in Turkey.- 13th World Conference on Earthquake Engineering, Vancouver, B.C., Canada, August 1-6, 2004, Paper No. 1428.
- Barka, A.A. and Kadinsky-Cade, K. (1988). Strike-slip fault geometry in Turkey and its influence on earthquake activity, *Tectonics*, 7: 663-684
- Erdik, M. (2000): Report on 1999 KOCAELI and DÜZCE (Turkey) Earthquakes.- Bogazici University, Dept. of Earthquake Engineering, 81220 Cengelkoy, Istanbul, Turkey
- Hebert, H., Francois Schindele, Yildiz Altinok, Bedri Alpar, Cem Gazioglu (2005): Tsunami hazard in the Marmara Sea (Turkey): A numerical approach to discuss active faulting and impact on the Istanbul coastal areas.- *Marine Geology* 215 (2005) 23– 43
- Heidbach, O., Tingay, M., Barth, A., Reinecker, J., Kurfeß, D. and Müller, B., The World Stress Map database release 2008 doi:10.1594/GFZ.WSM.Rel2008, 2008.  
[http://dc-app3-14.gfz-potsdam.de/pub/stress\\_data/stress\\_data\\_frame.html](http://dc-app3-14.gfz-potsdam.de/pub/stress_data/stress_data_frame.html)
- Pararas-Carayannis, G., (1999). The Earthquake and Tsunami of August 17, 1999 in the Sea of Marmara, Turkey.  
<http://www.drgeorgepc.com/Earthquake1999Turkey.html>
- Spence, R. (Ed. 2007): Earthquake Disaster Scenario, Prediction and Loss Modelling for Urban Areas.- LESSLOS Report No.2007/0, 7IUSS Press, Pavia 2007
- Taymaz, T., Tan, O. and Yolsal, S. (2004). Active Tectonics of Turkey and Surroundings: Seismic Risk in the Marmara Sea Region, In Fujii, N., Kasahara, J., Higashihara, H., and Ogawa, K. (Eds.), *The Proceedings of 1st International Workshop on Active Monitoring in the Solid Earth Geophysics (IWAM04)*, Extended Abstract Book: p. 110-115, Task Group for Active Monitoring, Mizunami City Culture Center, Gifu, Japan, June 30 - July 3, 2004  
[http://www.geop.itu.edu.tr/~taymaz/docs/Taymaz\\_IWAM04\\_S3-09.pdf](http://www.geop.itu.edu.tr/~taymaz/docs/Taymaz_IWAM04_S3-09.pdf)
- Tinti, S., Maramai, A., Graziani, L. (2001): A new version of the European tsunami catalogue: updating and revision, *Natural Hazards and Earth System Sciences* (2001) 1: 255–262.
- Internet sources:**
- 1) Southern California Earthquake Center, <http://www.scec.org/phase3/overview.html>
  - 2) International Seismological Centre, <http://www.isc.ac.uk/search/custom/index.html>
  - 3) Stress Data of the WSM, [http://dc-app3-14.gfz-potsdam.de/pub/stress\\_data/stress\\_data\\_frame.html](http://dc-app3-14.gfz-potsdam.de/pub/stress_data/stress_data_frame.html)
  - 4) <http://map.ngdc.noaa.gov/website/seg/hazards/viewer.htm>
  - 5) <http://www.koeri.boun.edu.tr/sismo/map/en/index.html>
  - 6) [http://earthquake.usgs.gov/earthquakes/eqarchives/epic/epic\\_rect.php](http://earthquake.usgs.gov/earthquakes/eqarchives/epic/epic_rect.php)
  - 7) <http://www.ioc-tsunami.org/content/view/282/1102/>