



## BUILDINGS WITH LOCAL ISOLATION SYSTEM: PRACTICALITY

H. Pourmohammad<sup>1</sup>, M. Ziyaeifar<sup>2</sup> and M. Ghafory-Ashtiany<sup>3</sup>

### ABSTRACT

Mass isolation as a seismic isolation is a method of structural vibration control against environmental loads such as strong earthquakes. Investigation is needed for building with local isolation systems (floor isolation systems) as a practical method of mass isolation. The major challenge for putting these buildings into practice is special isolators that are economical justification and have good performance. In this paper for solving this problem, structural details of these buildings are investigated; then a new isolator is proposed.

### Introduction

Three methods for isolation are "base isolation", "mass isolation", and "partial mass isolation" [Ziyaeifar, et al. 1998, 2000, and 2002]. In base isolation method, the structural seismic response is reduced by using a flexible layer under the structure (between structure and ground) [see, for example, Skinner et al. 1993, and Naeim et al. 1999]. In the base isolation method actually, structure stiffness is isolated from ground that may cause some problems such as instability in large displacement, rocking motion of structure, periodic shift of structure and effectiveness wind motion and not using them in tall buildings. The structural mass as the main source of vibration absorbs earthquake input energy in the structure. So, controlling the vibration of the structure requires isolation of mass, from the structure and not necessarily from the ground. Mass isolation can be a suitable approach for this target. Such buildings with floor isolation systems (FIS) are a practical method of mass isolation. This causes the building with FIS to be divided into a soft part and a stiff part. The major mass of the building is concentrated in the soft part during low acceleration and the minor mass is concentrated in the stiff part [Pourmohammad, et al. 2004, 2006]. Hence, equipping buildings with floor isolation can be an effective method of reducing structural seismic response. The construction of a building with FIS requires the main structure (columns and beams) be constructed first. Isolators are then placed on the beams and finally the floor slab is constructed on the isolators [Pourmohammad, et al. 2004, 2006]. If a part of mass has been isolated, this is called "partial mass isolation".

Floor isolation systems (FIS) have been applied to many types of construction, such as Power Plants, Industrial Structures and Vibration-sensitive Rooms [see, for example, Fuller, et al 2002, Yaghoubian, et al. 1991, and Sabbagh, et al. 2004]. The target of this isolation is to control the response of the floor and/or the equipment on it. The FIS (local isolation system) presented in this paper controls the response of the main structure of a building as well as reducing floor acceleration.

---

<sup>1</sup> Assistant Prof., Dept. of Civil Engineering, Islamic Azad University, Karaj Branch, Tehran, Iran

<sup>2</sup> Assistant Prof., International Institute of Earthquake Engineering and Seismology (IIEES), Tehran, Iran

<sup>3</sup> Professor and Head, International Institute of Earthquake Engineering and Seismology (IIEES), Tehran, Iran

Buildings with FIS such as multiple tuned mass dampers and secondary systems are known as non-classically damped systems. The available methods to dynamics analysis are complex and require time-consuming analyses. Furthermore, design and control methods work best for a building with a small number of degrees of freedom. To overcome this difficulty, a simplified method is proposed for the omitted, unnecessary degrees of freedom [Pourmohammad, 2006]. The proposed method uses a much smaller number of degrees of freedom, the advantages of the standard mode-superposition method, and a simple model of mass damping and stiffness matrices.

There are many challenges for putting such buildings into practice as a controlling system. For example, many appropriate isolators are needed. These isolators must have economical justification and have to be satisfactory performance. Isolators designed for floor of multiple stories buildings should be light weight and have low lateral stiffness to resist earthquake input. Manufacture procedure of currently available elastomeric isolators are difficult and consequently, expensive. In this paper, after examining structural details of such buildings, an elastomeric isolator is presented, and a prototype constructed and tested, to put these buildings into practice. The first proposal of this isolator is presented by second author [Ziyaeifar, 2001].

### Challenges to Practical Applications

In this research, for evaluating practicality of buildings with floor isolated system, a regular 10-story is considered. In floor design of these buildings a two way flat slab system is used. One of most important factors for designing the flat slab is punching shear control this criteria depend on the number of isolators. For example two different cases of the locations of isolators on beams for each story are shown in figures 1 and 2. In case 2 (figure 2), comparing to case 1 (figure 1), lesser isolators are used. This is a more cost-effective and economical. In both cases, shear punching is checked using ACI code. There no necessities for using shear stiffeners in the slab. If lesser isolators shown in figure 2 are used, a measure was taken for punching shear control.

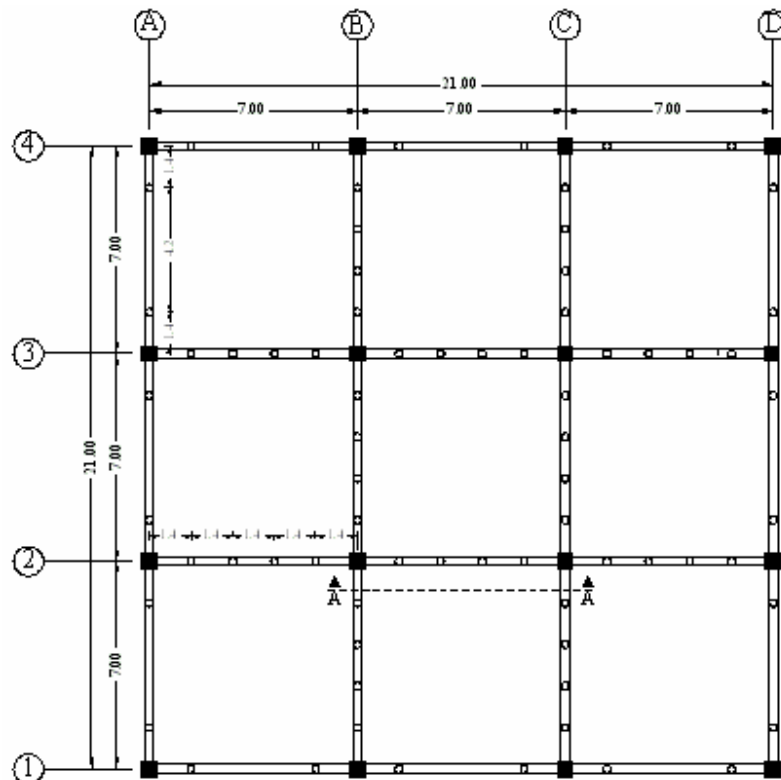


Figure 1. Isolators locations on beams for each story in case 1.

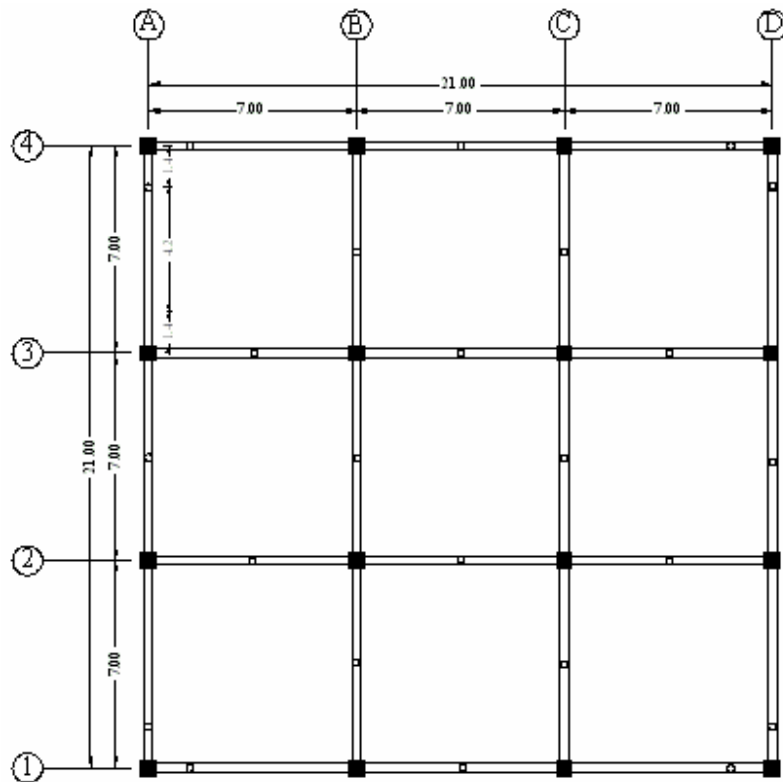


Figure 2. Isolators locations on beams for each story in case 2.

More details for this building with larger scale are shown in figure 3. The horizontal distance between floors and main structure (columns) is one of main factors for designing these buildings systems. In economical design, performance of these buildings is assumed in two phases, first phase, is before pounding floors to columns and second phase is after pounding floors and slabs [Pourmohammad, 2006]. In second phase, impulsive effects of floors to columns are absorbed by stopper.

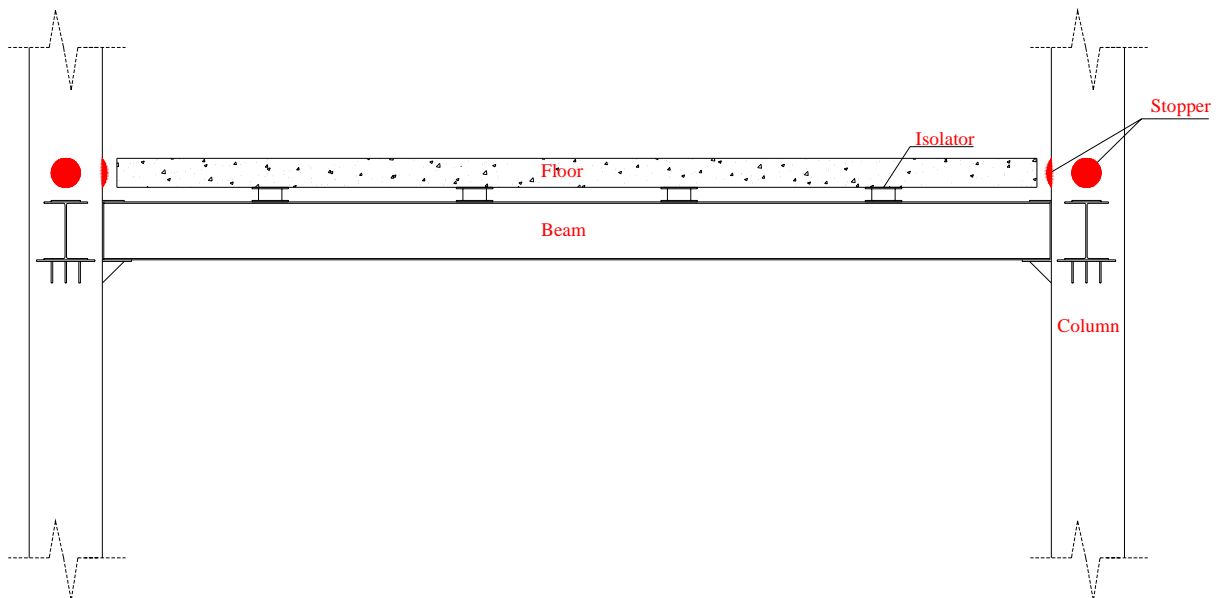



Figure 3. Cut view-(A-A)

Structural details of floors are investigated, a two-way slab system can satisfy all the design factors and there is no need to design a new floor system. For practicality these buildings require so many isolators that are suitable performance and have economical justification. The available seismic rubber isolators have the lengthy processes of manufacturing result in a high price. In this paper a new rubber isolator is introduced that may solve this problem. Floors isolators are designed for light weight and low lateral stiffness against earthquake input, high vertical stiffness for the isolators must not be necessary. Because rocking is not a problem, like base isolation, and as demand displacement is lower than base isolation, the height of isolators can be much lower. Furthermore, large displacement and stability of these systems is not a concern because limited systems (columns) exist. If vertical isolation is needed, a 3-dimensional isolator can be applied.


### Elastomeric Isolators with Steel Rings

The state of hydrostatic pressure inside of elastomeric isolators is the key point in providing the high ratio of vertical to horizontal stiffness in such devices. In this study the state of hydrostatic pressure is provided by steel rings instead of steel shims used in classical elastomeric isolators. One advantage of this isolator is the possibility of adding new liquid materials to the core to increase damping.

These isolators are categorized in to "isolators with inner steel rings" and "isolators with outer steel rings" (figure 4). According to the needed performance in design, one of them is chosen. Performance of these isolators is compared with classical elastomeric isolators (elastomeric isolator with steel shims) theoretically, numerically, and experimentally. The results shows suitable performance of these isolators in seismic isolators (especially in light weight isolating) and closeness of theoretical, numerical, and experimental results were seen [Pourmohammad, 2006].

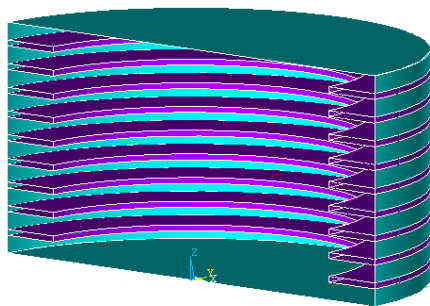

a) Elastomeric isolators with inner steel rings

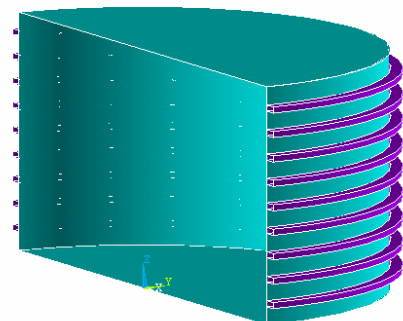


b) Elastomeric isolators with outer steel rings

Figure 4. Proposed elastomeric isolators.

One of the main advantages of these isolators is their simple and economical process manufacture. In this paper manufacturing procedure and experimental results of a prototype is presented. In manufacturing procedure, first of all, steel rings is produced as shown in figure 5-a, then the rings are placed into the mold, and now the mold and the rings within is put on the bottom plate, after that rubber compound is lead on the middle core by pressure increase until the rubber penetrates among the rings. The figure 5-b shows the space among the rings is filling with the rubber. For the last step of the manufacturing procedure, the upper steel plate will be put on the mold by a low rate of pressure.



a) Inner steel rings with assembling plain bars

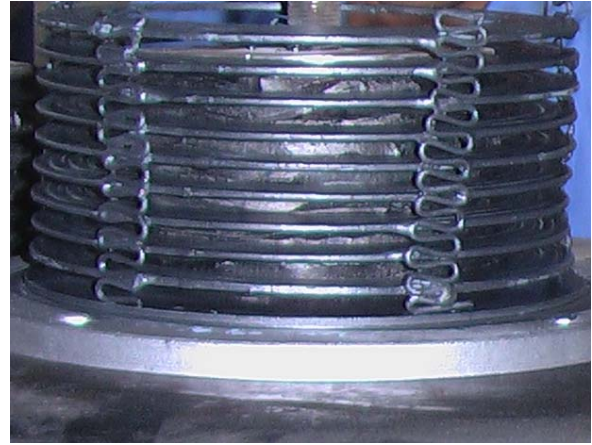

b) Rubber penetrates among the rings with assembling meandering bars

Figure 5. Manufacturing procedure of proposed isolator.

An isolator with inner steel rings was constructed. The characteristics of the isolator are shown in Table 1. Vertical and horizontal stiffness obtained by  $k_V = \omega_V^2 m$ ,  $k_H = \omega_H^2 m$ ,  $T_V = 0.10$  sec,  $T_H = 1.50$  sec, and  $m = 6$  ton result in a design with a vertical stiffness of  $k_V = 23.7 \times 10^6$  N/m and a horizontal stiffness of  $k_H = 10.5 \times 10^4$  N/m. The main geometrical details of an isolator with inner steel rings are summarized in Table 2.

Table 1. Characteristics of new isolator.


Parameter	Value
Design vertical load (kN)	60
Horizontal natural period (s)	1.5
Vertical natural period (s)	0.1
Horizontal damping (%)	10
Design horizontal displacement (mm)	80
Rubber shear modulus (Mpa)	0.4

Table 2. Geometrical details of isolator with inner steel rings.


Parameter	Value
Outer diameter of steel rings (mm)	160
Inner diameter of steel rings (mm)	120
Number of steel rings	9
Thickness of steel rings (mm)	1.5
Total bearing height (mm)	80

In this paper, two series of tests have been performed on isolators. First, prototype of isolator is loaded vertically and second loaded by vertical and shearing forces simultaneously. The test was performed using a vertical actuator for vertical load only. A prototype of the proposed isolator with vertical actuators

is shown in Figure 6-a. The isolator was loaded to a vertical displacement of 3mm at a steady rate; the length of time to apply the maximum load was 30sec. The vertical force-displacement curve is shown in figure 6-b. The figure is shown that the vertical stiffness resulted from the test is close to design vertical stiffness.

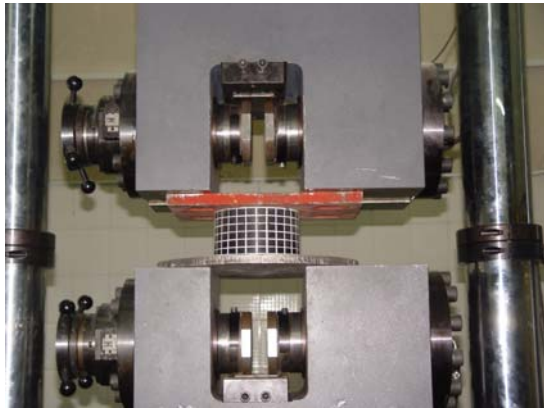

a) Test set up 1

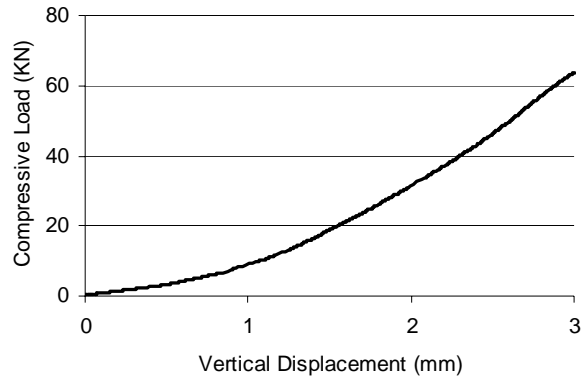


b) Vertical load-displacement relation actuator

Figure 6. Vertical loading test.

This prototype was examined under the vertical load 64kN, with shear displacement amplitudes  $\pm 10$ ,  $\pm 20$ ,  $\pm 30$ ,  $\pm 40$ ,  $\pm 50$ ,  $\pm 60$ ,  $\pm 70$ , and  $\pm 80$ mm in three loading cycles for each shear displacement range. For vertical and shear loading, test set up no. 2 that is shown in figure 7 is used. Details for test set up no. 2 are as follows:

- 1- A main frame that a horizontal actuator, for applying shear loading; a vertical actuator for applying vertical loading and a horizontal beam for transferring vertical and shear loading to prototype isolator are attached to it.
- 2- A horizontal actuator
- 3- A vertical actuator
- 4- The horizontal beam that is attached to prototype isolator, act lever-like. The end part of beam is rolling support. The prototype isolator is another support of beam. Vertical loading is applied of the other end of beam by the vertical actuator. So the vertical load to isolator prototype is the resultant, vertical actuator load and rolling support reaction.

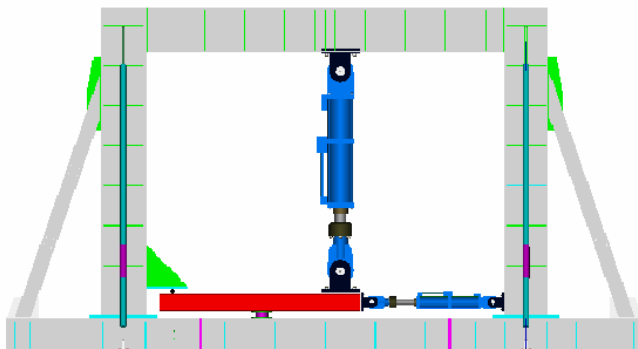


a) Schematic model



b) constructed model

Figure 7. Test set up 2.

The shear effective stiffness-displacement is shown in Fig. 8-b. It is seen in Fig. 8-b that the shear stiffness resulted from the test is close to designed shear stiffness and is not dependent on number of loading cycles. Also deformation shape of the isolator in shear displacement with amplitude 80mm is shown in Fig. 8-b. There is no lock of quality is seen in it.

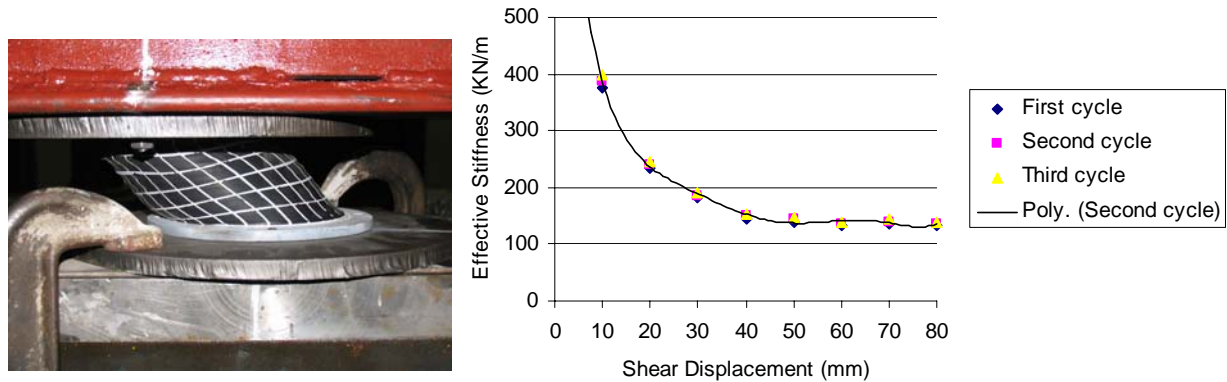

a) Deformation shape in displacement 80mm      b) Shear Effective Stiffness-displacement relation

Figure 8. Shear loading.

The shear effective damping Ratio of the isolator for different shear displacement amplitudes is shown in Fig. 9. The figure indicates that the damping ratio in small shear displacement amplitude is substantial (approximately %16). The reason is existence of assembling copper bars (assembling bars used to arrange inner steel rings with a constant displacement), this case seems to be a good devices to increase damping of isolators. But in large shear displacement amplitude the effect of these bars are virtually excluded from system. Also in larger shear displacement amplitude, the value of damping ratio (approximately %9.5) is rather substantial. This issue might be because of energy absorbing of steel rings in large deformations. Also Fig. 9 indicates that the damping ratio of the isolator is not depended on the number of loading cycles.

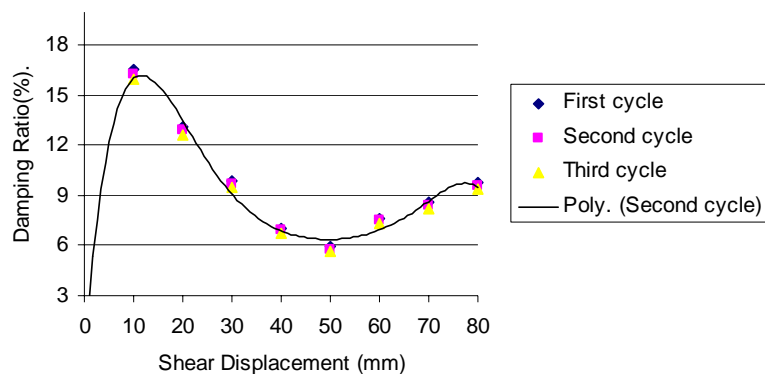


Figure 9. Shear effective damping ratio-displacement relation.

## Conclusions

There are two main problems in putting the buildings with local isolation systems (the buildings with FIS) into practice as a controlling system. First, few isolators for optimum and economical design are needed. Second, a kind of isolator is needed that provides the demand performance and is cost effective. The first problem could be solved in designing procedure of floors system by choosing the number of optimum isolator and suitable floor system. In this paper for solving second problem, elastomeric isolator with steel

rings is proposed. The experimental results show good performance of such isolators. Furthermore, these isolators considering simple procedure of manufacture are economically justified.

### References

- Fuller, K.N.G, Ahmadi, H.R., Bergamo, G., 2002. Isolation of floors against vibration and tri-axial seismic inputs. Proc 12th European Conf on Earthquake Eng: Special Session on Advances in Earthquake Experimental Studies, London,
- Naeim, F., and Kelly, J.M., 1999. Design of Seismic Isolated Structure, From theory to Practice, John Wiley and Sons, New York,
- Pourmohammad, H., Ziyaeifar, and M., Ghafory-Ashtiany, M., 2004. Analytic Study of Floor Isolation System, 13th World conference on Earthquake Engineering, No. 3372, Vancouver.
- Pourmohammad, H., 2006. Analytical and experimental studies of story diaphragm isolation system for seismic response design structures (in Farsi), Ph.D. thesis, Islamic Azad University, Science and Research Campus, Tehran, Iran.
- Sabbagh, H., Esmailzadeh-Hakimi B., 2004. Design, manufacture and dynamic testing of a seismic isolation system for equipment floors in power industry, 13th World Conf on Earthquake Eng. Vancouver
- Skinner, R.I., Robinson, W.H., and McVerry, G.H., 1993. An Introduction to Seismic Isolation, John Wiley and Sons, New York,
- Yaghoubian, J., 1991. Isolation building contents from earthquake induced floor motions, Earthquake Spectra, 127-43.
- Ziyaeifar, M., Noguchi H., 1998. Partial mass isolation in tall building, Earthquake Eng and Struc Dyn, 49-67.
- Ziyaeifar, M., 2000. Method of mass isolation in seismic design of structure. 12th World Conf on Earthquake Eng. New Zealand; Paper 1441.
- Ziyaeifar, M., 2002, Mass isolation, concept and techniques. J Euro Ass Earthquake Eng, 43-55.
- Ziyaeifar, M., 2001. Current R&V on passive energy dissipation and seismic isolation techniques in iran. 7th international seminar on seismic isolation, passive energy dissipation and active control of vibration of structures. Assisi, Italy.